

VB2

Miniature Circuit Breaker





- Quick closing ensures reliable operation and extends the lifetime of circuit breakers
- The temperature-rise of the product itself is lower
- Rated impulse withstand voltage up to 6.0kV
- Tunnel type wiring structure and busbar type wiring structure, reliable and fast wiring
- Modular and modular structure, can be combined arbitrarily

Ambient conditions

Operating ambient temperature/storage temperature

- Operating environment temperature: $-40\text{ }^{\circ}\text{C}\sim+70\text{ }^{\circ}\text{C}$, with an average value of no more than $+35\text{ }^{\circ}\text{C}$ within 24 hours
- Storage temperature: $-40\text{ }^{\circ}\text{C}\sim+80\text{ }^{\circ}\text{C}$

Altitude conditions

- Altitude of installation site $\leq 2000\text{m}$ (Over 2000 meters need capacity reduction for using)

Damp heat resistance

- Category 2 (at a temperature of $55\text{ }^{\circ}\text{C}$ and a relative humidity of 95%)

Pollution level

- Level 2

Protection level

- Product protection level: IP20

Installation Category

- Class II (load) and Class III (distribution and control)

Installation method

- Installed on $\text{TH}35\text{mm} \times 7.5$ (EN50022) Standard Guide

Installation Direction

- Vertical installation of the product, with an inclination of $\leq \pm 5^{\circ}$ between the installation surface and the vertical surface
- Horizontal installation

Environmental requirements

- The product meets RoHS standards

Technical parameters

| Series | | VB2-63 |
|--|--|-------------|
|  | | |
| Rated Operational Voltage (U_e) | AC 230/400V, DC 48/60V (1P/2P) | |
| Rated Current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A | |
| Tripping Characteristic | B Curve $3I_n \sim 5I_n$, C Curve $5I_n \sim 10I_n$, D Curve $10I_n \sim 14I_n$ | |
| Number of Poles | 1P, 2P, 3P, 4P | |
| Rated Insulation Voltage (U_i) | 690 V | |
| Rated Impulse Withstand Voltage (U_{imp}) | 6.0 kV | |
| Rated Short-Circuit Capacity (I_{cn}) | 10.0kA (Type B/C, $I_n=1-63A$), 6.0kA (Type D, $I_n=1-63A$) | |
| Running Short-Circuit Capacity (I_{cs}) | 10.0kA (Type B/C, $I_n=1-40A$), 7.5kA (Type B/C, $I_n=50A, 63A$), 6.0kA (Type D, $I_n=1-63A$) | |
| Rated Frequency | 50/60 Hz | |
| Operating performance | Mechanical Endurance | 15000 Cycle |
| | Electrical Endurance | 10000 Cycle |
| Standard | IEC 60898-1 | |
| Connection | Tunnel type, Bus-bar | |
| Connecting Capacity | 1.0 mm ² ...25 mm ² | |
| Tightening Torque | 2.5 N·m | |

VB2-63 Main Characteristics

VOZWEI

| | | | | | | | | |
|------------|---|-----------|--|----------|--|-----------|---|----------|
| VB2 | - | 63 | | C | | 63 | / | 1 |
| 1 | | 2 | | 3 | | 4 | | 5 |

| SN | Name | Specification, type code |
|----|-------------------------|--|
| 1 | Design code | VB2: Design code |
| 2 | Frame rating | 63: 63A |
| 3 | Tripping characteristic | B: $3I_n \sim 5I_n$ C: $5I_n \sim 10I_n$ D: $10I_n \sim 14I_n$ |
| 4 | Rated current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A |
| 5 | Number of poles | 1P, 2P, 3P, 4P |

Temperature and Breaking Capacity Coefficient

| Ambient °C | -40 °C | -30 °C | -20 °C | -10 °C | 0 °C | 10 °C | 20 °C | 30 °C | 40 °C | 50 °C | 60 °C | 70 °C |
|-------------|---------|---------|---------|---------|---------|---------|---------|-------|--------|--------|--------|--------|
| Coefficient | 133.97% | 125.18% | 119.90% | 116.95% | 113.05% | 109.52% | 105.62% | 100% | 95.24% | 91.33% | 88.38% | 83.62% |


Breaking Capacity Coefficient and High Altitude Derating Tables

| Altitude | Rated current | Rated voltage | Rated frequency voltage tolerance | Breaking Capacity | Breaking Capacity and Electrical life |
|----------|---------------|---------------|-----------------------------------|-------------------|---------------------------------------|
| 2 km | $1.00I_n$ | U_e | 1.00 | 1.00 | 1.00 |
| 3 km | $0.96I_n$ | U_e | 0.92 | 0.88 | 0.88 |
| 4 km | $0.92I_n$ | U_e | 0.83 | 0.82 | 0.82 |
| 5 km | $0.87I_n$ | U_e | 0.77 | 0.70 | 0.70 |

VB2-63 Characteristic Curve

VOZWEI

B curve

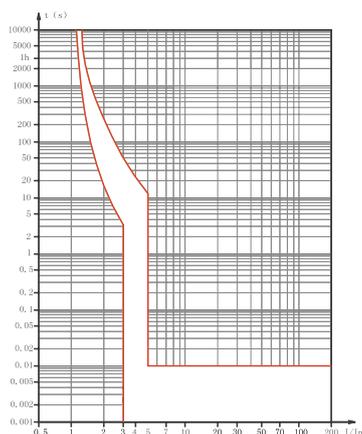

Protection against loads with small short circuit currents (e.g., non-inductive or micro-inductive circuits)


Trip characteristics:

The instantaneous trip range is $3I_n \sim 5I_n$

Base temperature:

+30°C

C curve

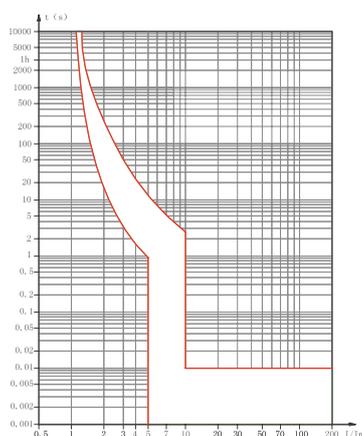

Protection of conventional loads and distribution circuits


Trip characteristics:

The instantaneous trip range is $5I_n \sim 10I_n$

Base temperature:

+30°C

D curve

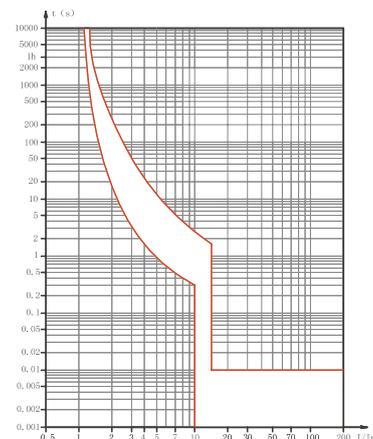

Protection of impulse loads with large starting current (e.g., motors, transformers, etc.)




Trip characteristics:

The instantaneous trip range is $10I_n \sim 14I_n$


Base temperature:

+30°C

Overall and Mounting Dimensioned

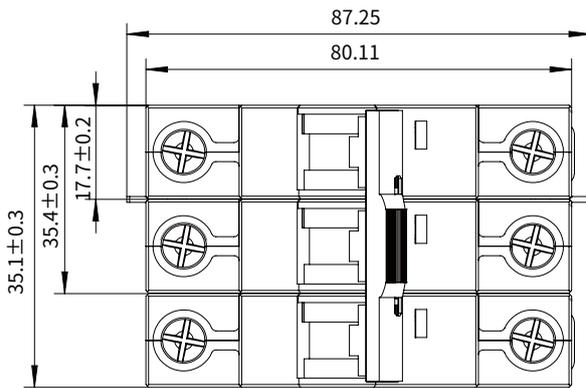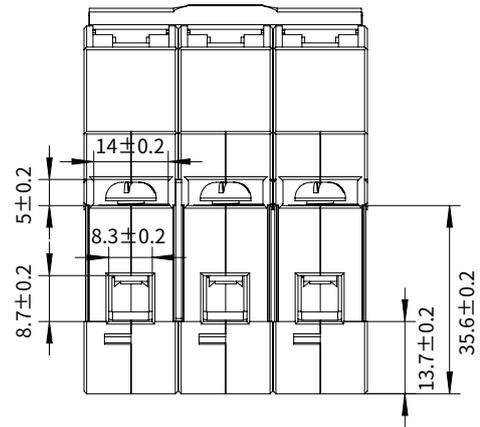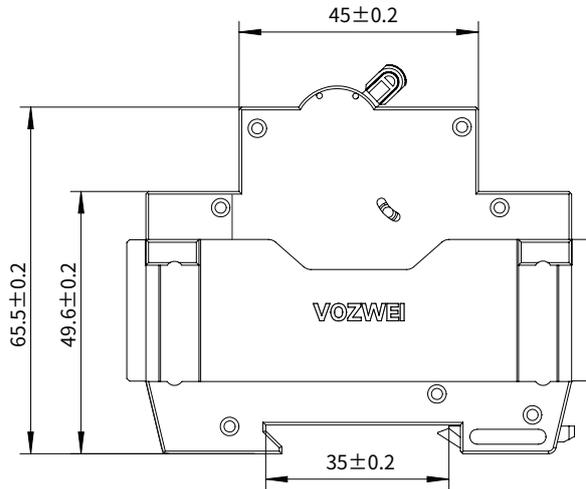

Wiring Diagram

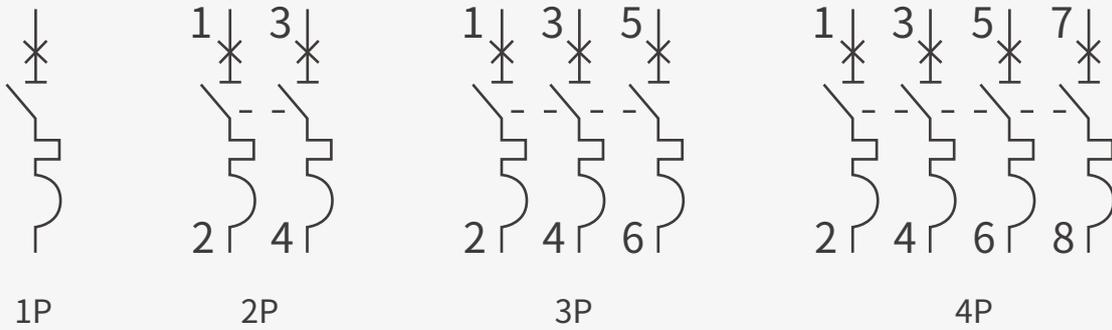

Technical parameters

| Series | | VB2T-63 |
|--|--|-------------|
|  | | |
| Rated Operational Voltage (U_e) | AC 230/400V (1P), AC 400/415V (2P, 3P, 4P), DC 60/80V (1P), DC 80/125V (2P) | |
| Rated Current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A | |
| Tripping Characteristic | B Curve $4I_n \pm 20\%$, C Curve $8I_n \pm 20\%$, D Curve $12I_n \pm 20\%$, K Curve $10I_n \pm 20\%$, Z Curve $2.5I_n \pm 20\%$ | |
| Number of Poles | 1P, 2P, 3P, 4P | |
| Rated Insulation Voltage (U_i) | 690 V | |
| Rated Impulse Withstand Voltage (U_{imp}) | 6.0 kV | |
| Rated Short-Circuit Capacity (I_{cu}) | 10.0kA | |
| Running Short-Circuit Capacity (I_{cs}) | 10.0kA | |
| Rated Frequency | 50/60 Hz | |
| Operating performance | Mechanical Endurance | 15000 Cycle |
| | Electrical Endurance | 10000 Cycle |
| Standard | IEC 60947-2 | |
| Connection | Tunnel type, Bus-bar | |
| Connecting Capacity | 1.0 mm ² ...25 mm ² | |
| Tightening Torque | 2.5 N·m | |

VB2T-63 Main Characteristics

VOZWEI

| | | | | | | | | |
|-------------|---|-----------|--|----------|--|-----------|---|----------|
| VB2T | – | 63 | | C | | 63 | / | 1 |
| 1 | | 2 | | 3 | | 4 | | 5 |

| SN | Name | Specification, type code |
|----|-------------------------|--|
| 1 | Design code | VB2T: Design code |
| 2 | Frame rating | 63: 63A |
| 3 | Tripping characteristic | B, C, D, K, Z |
| 4 | Rated current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A |
| 5 | Number of poles | 1P, 2P, 3P, 4P |


Temperature and Breaking Capacity Coefficient

| Ambient °C | -40 °C | -30 °C | -20 °C | -10 °C | 0 °C | 10 °C | 20 °C | 30 °C | 40 °C | 50 °C | 60 °C | 70 °C |
|-------------|---------|---------|---------|---------|---------|---------|---------|-------|--------|--------|--------|--------|
| Coefficient | 133.97% | 125.18% | 119.90% | 116.95% | 113.05% | 109.52% | 105.62% | 100% | 95.24% | 91.33% | 88.38% | 83.62% |

Breaking Capacity Coefficient and High Altitude Derating Tables

| Altitude | Rated current | Rated voltage | Rated frequency voltage tolerance | Breaking Capacity | Breaking Capacity and Electrical life |
|----------|--------------------|----------------|-----------------------------------|-------------------|---------------------------------------|
| 2 km | 1.00I _n | U _e | 1.00 | 1.00 | 1.00 |
| 3 km | 0.96I _n | U _e | 0.92 | 0.88 | 0.88 |
| 4 km | 0.92I _n | U _e | 0.83 | 0.82 | 0.82 |
| 5 km | 0.87I _n | U _e | 0.77 | 0.70 | 0.70 |

B curve

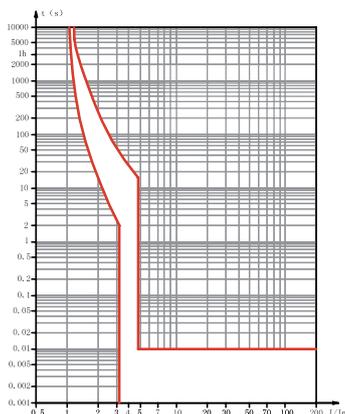

Protection against loads with small short circuit currents (e.g., non-inductive or micro-inductive circuits)


Trip characteristics:

The instantaneous trip range is $4I_n \pm 20\%$

Base temperature:

+30°C

C curve

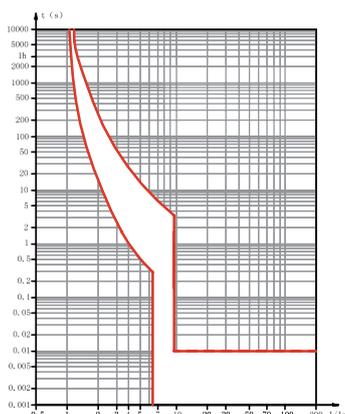

Protection of conventional loads and distribution circuits


Trip characteristics:

The instantaneous trip range is $8I_n \pm 20\%$

Base temperature:

+30°C

D curve

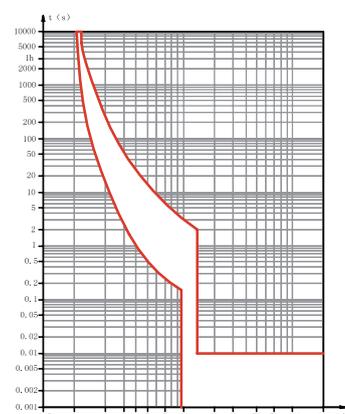

Protection of impulse loads with large starting current (e.g., motors, transformers, etc.)


Trip characteristics:

The instantaneous trip range is $12I_n \pm 20\%$

Base temperature:

+30°C

K curve

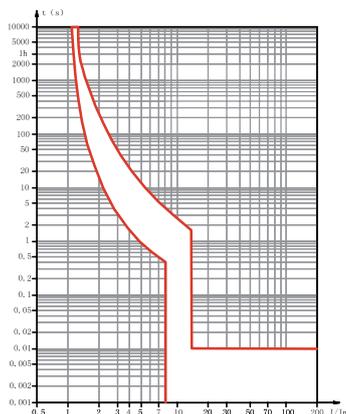

Protection of impulse loads with large starting current


Trip characteristics:

The instantaneous trip range is $10I_n \pm 20\%$

Base temperature:

+30°C

Z curve

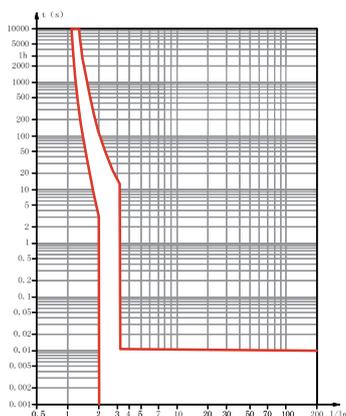

Protecting loads or distribution circuits that require more sensitive action




Trip characteristics:

The instantaneous trip range is $2.5I_n \pm 20\%$


Base temperature:

+30°C

Overall and Mounting Dimensioned

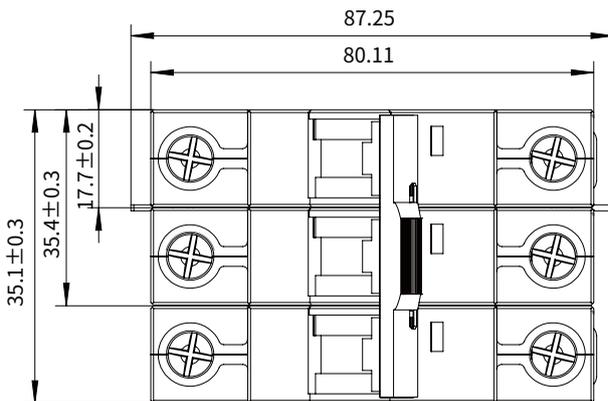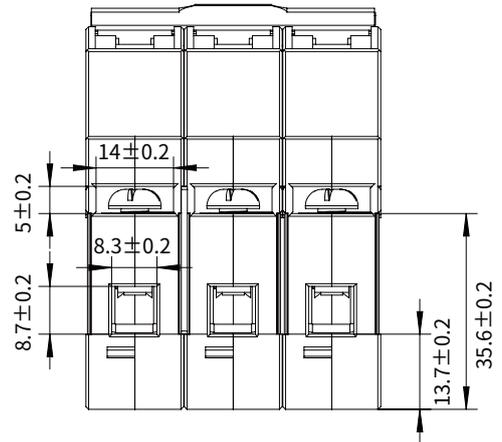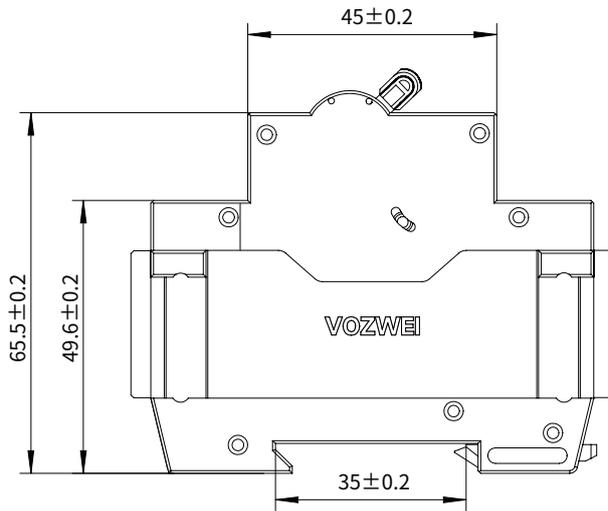

Wiring Diagram

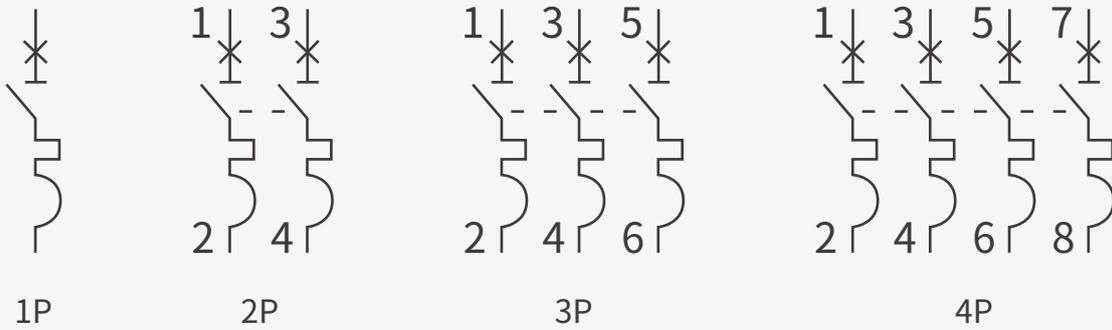


Technical parameters

| Series | VB2TS-63 (Magnetic protection only) | |
|--|--|-------------|
|  | | |
| Rated Operational Voltage (U_e) | AC 230/400V (1P), AC 400/415V (2P, 3P, 4P), DC 60/80V (1P), DC 80/125V (2P) | |
| Rated Current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A | |
| Tripping Characteristic | B Curve $4I_n \pm 20\%$, C Curve $8I_n \pm 20\%$, D Curve $12I_n \pm 20\%$ | |
| Number of Poles | 1P, 2P, 3P, 4P | |
| Rated Insulation Voltage (U_i) | 690 V | |
| Rated Impulse Withstand Voltage (U_{imp}) | 6.0 kV | |
| Rated Short-Circuit Capacity (I_{cu}) | 10.0kA | |
| Running Short-Circuit Capacity (I_{cs}) | 10.0kA | |
| Rated Frequency | 50/60 Hz | |
| Operating performance | Mechanical Endurance | 15000 Cycle |
| | Electrical Endurance | 10000 Cycle |
| Standard | IEC 60947-2 | |
| Connection | Tunnel type, Bus-bar | |
| Connecting Capacity | $1.0 \text{ mm}^2 \dots 25 \text{ mm}^2$ | |
| Tightening Torque | $2.5 \text{ N} \cdot \text{m}$ | |

| | | | | | | | |
|-------------|----------|---|-----------|----------|-----------|---|----------|
| VB2T | S | - | 63 | C | 63 | / | 1 |
| 1 | 2 | | 3 | 4 | 5 | | 6 |

| SN | Name | Specification, type code |
|----|-------------------------|--|
| 1 | Design code | VB2T: Design code |
| 2 | Function code | S: Magnetic protection only |
| 3 | Frame rating | 63: 63A |
| 4 | Tripping characteristic | B, C, D |
| 5 | Rated current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A |
| 6 | Number of poles | 1P, 2P, 3P, 4P |

B curve

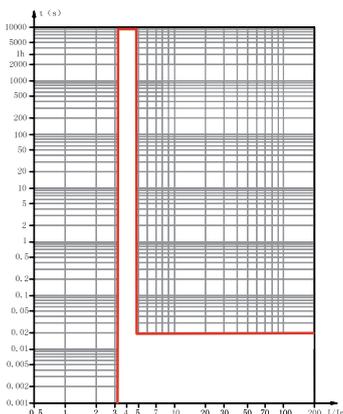

Protection against loads with small short circuit currents (e.g., non-inductive or micro-inductive circuits)


Trip characteristics:

The instantaneous trip range is $4I_n \pm 20\%$

Base temperature:

+30°C

C curve

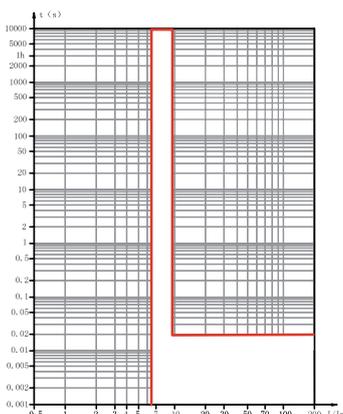

Protection of conventional loads and distribution circuits


Trip characteristics:

The instantaneous trip range is $8I_n \pm 20\%$

Base temperature:

+30°C

D curve

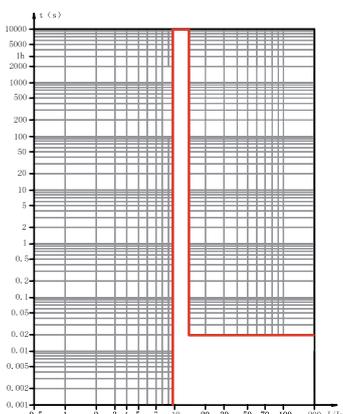

Protection of impulse loads with large starting current (e.g., motors, transformers, etc.)


Trip characteristics:

The instantaneous trip range is $12I_n \pm 20\%$


Base temperature:

+30°C

Overall and Mounting Dimensioned

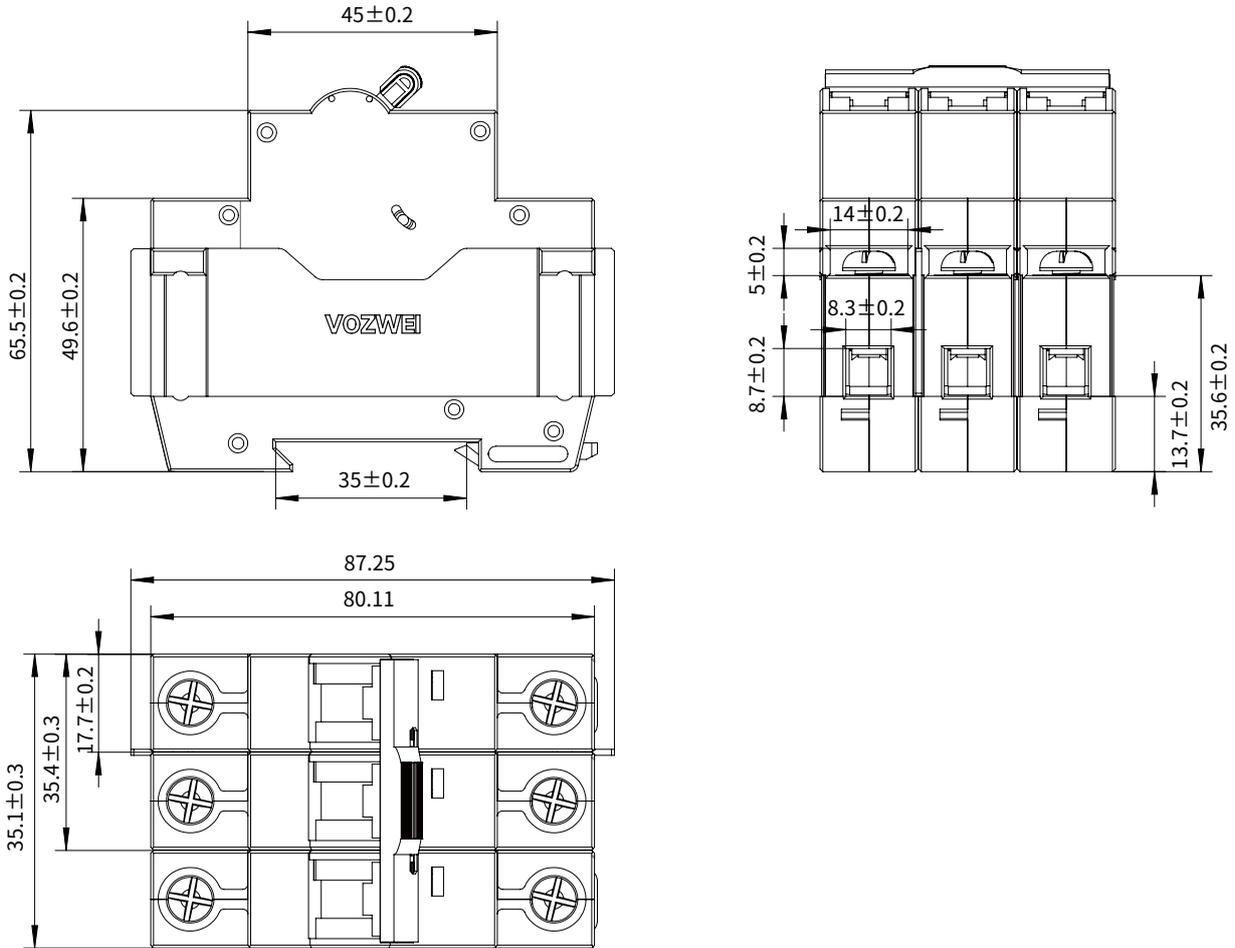

Wiring Diagram

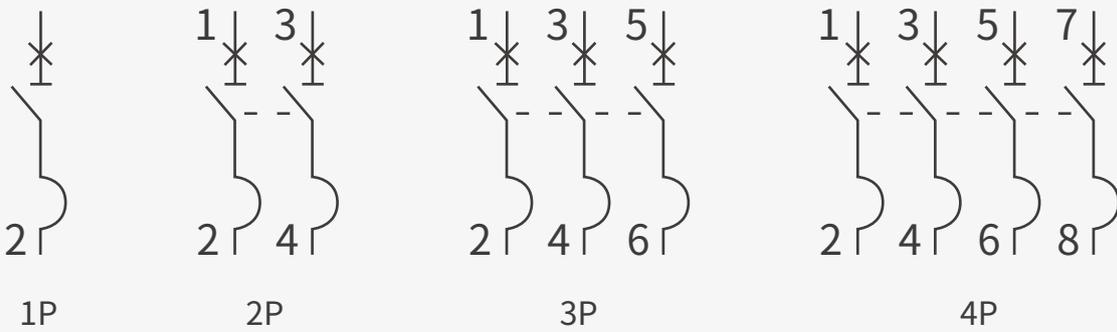

Technical parameters

| Series | | VB2Z-63 |
|--|---|-------------|
|  | | |
| Rated Operational Voltage (U_e) | DC 125/220/250V (1P), DC 250/440/500/690/800V (2P), DC 750/800V (3P), DC 800/1000V (4P) | |
| Rated Current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A | |
| Tripping Characteristic | B Curve $6I_n \pm 20\%$, C Curve $12I_n \pm 20\%$ | |
| Number of Poles | 1P, 2P, 3P, 4P | |
| Rated Insulation Voltage (U_i) | 1000 V | |
| Rated Impulse Withstand Voltage (U_{imp}) | 6.0 kV | |
| Rated Short-Circuit Capacity (I_{cu}) | DC 125/220/250V (1P), DC 250/440/500V (2P):10kA DC 690/800V (2P):6kA DC 750/800V (3P), DC 800/1000V (4P):5kA | |
| Running Short-Circuit Capacity (I_{cs}) | DC 125/220/250V (1P):7.5kA DC 250/440/500V (2P):6kA DC 690V (2P):4.5kA DC 800V (2P):3kA DC 750/800V (3P):5kA DC 800/1000V (4P):5kA | |
| Operating performance | Mechanical Endurance | 15000 Cycle |
| | Electrical Endurance | 10000 Cycle |
| Standard | IEC 60947-2 | |
| Connection | Tunnel type, Bus-bar | |
| Connecting Capacity | 1.0 mm ² ...25 mm ² | |
| Tightening Torque | 2.5 N·m | |

VB2Z-63 Main Characteristics

VOZWEI


| | | | | | | | |
|------------|----------|---|-----------|----------|-----------|---|----------|
| VB2 | Z | – | 63 | C | 63 | / | 1 |
| 1 | 2 | | 3 | 4 | 5 | | 6 |

| SN | Name | Specification, type code |
|----|-------------------------|--|
| 1 | Design code | VB2: Design code |
| 2 | Function code | Z: DC type |
| 3 | Frame rating | 63: 63A |
| 4 | Tripping characteristic | B, C |
| 5 | Rated current | 1A, 2A, 3A, 4A, 6A, 8A, 10A, 13A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A |
| 6 | Number of poles | 1P, 2P, 3P, 4P |

Temperature and Breaking Capacity Coefficient

| Ambient °C | -40 °C | -30 °C | -20 °C | -10 °C | 0 °C | 10 °C | 20 °C | 30 °C | 40 °C | 50 °C | 60 °C | 70 °C |
|-------------|---------|---------|---------|---------|---------|---------|---------|-------|--------|--------|--------|--------|
| Coefficient | 131.59% | 127.14% | 123.10% | 118.81% | 114.40% | 109.76% | 105.07% | 100% | 94.44% | 88.77% | 82.63% | 76.20% |

B curve

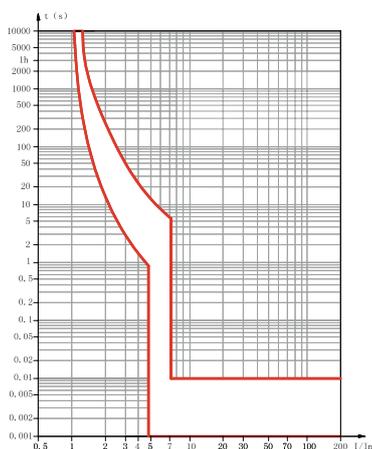

Protection against loads with small short circuit currents (e.g., non-inductive or micro-inductive circuits)


Trip characteristics:

The instantaneous trip range is $6(1 \pm 20\%) I_n$

Base temperature:

+30°C

C curve

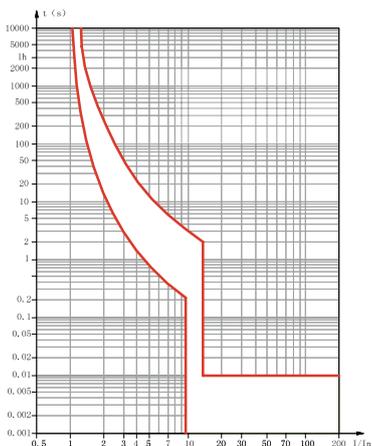

Protection of conventional loads and distribution circuits

Trip characteristics:

The instantaneous trip range is $12(1 \pm 20\%) I_n$




Base temperature:

+30°C

VB2Z-63 Size and Connection



Overall and Mounting Dimensioned

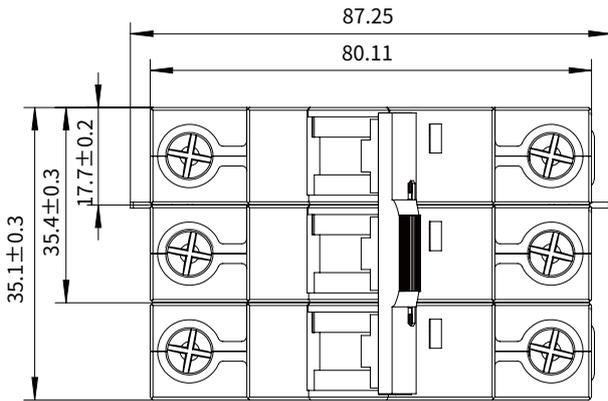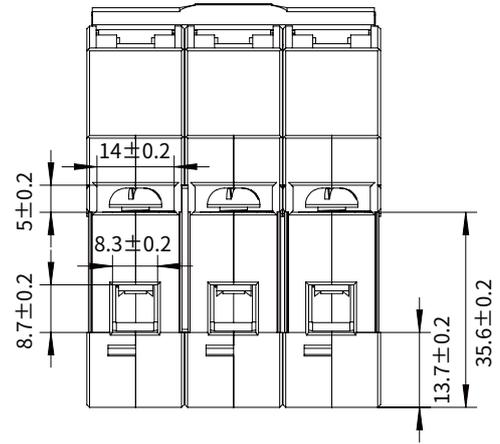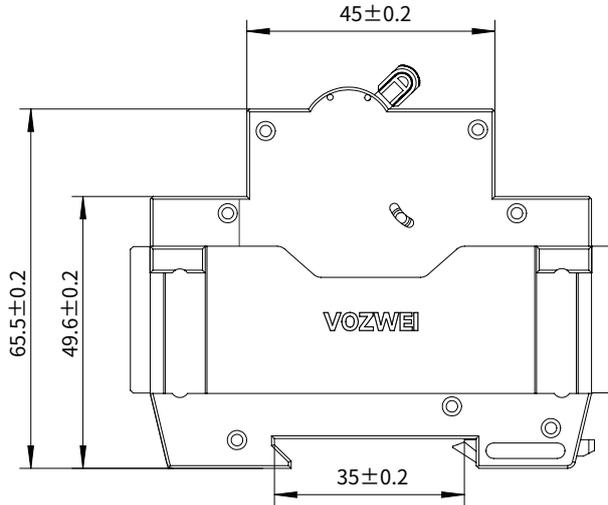

Wiring Diagram

